




When it comes to anchoring, Maxwell provides the ultimate anchoring solution backed by sound advice and after sales service. A full range of anchoring accessory items are available. Please contact your nearest Maxwell office or local distributor for helpful advice and assistance.

MAXSET ANCHORS


The "MAXSET" galvanised and stainless steel (AISI 316) anchor range, based on the proven 'Plough' design is available in four different sizes to suit boats from approximately 4 m (15') to 17 m (55').

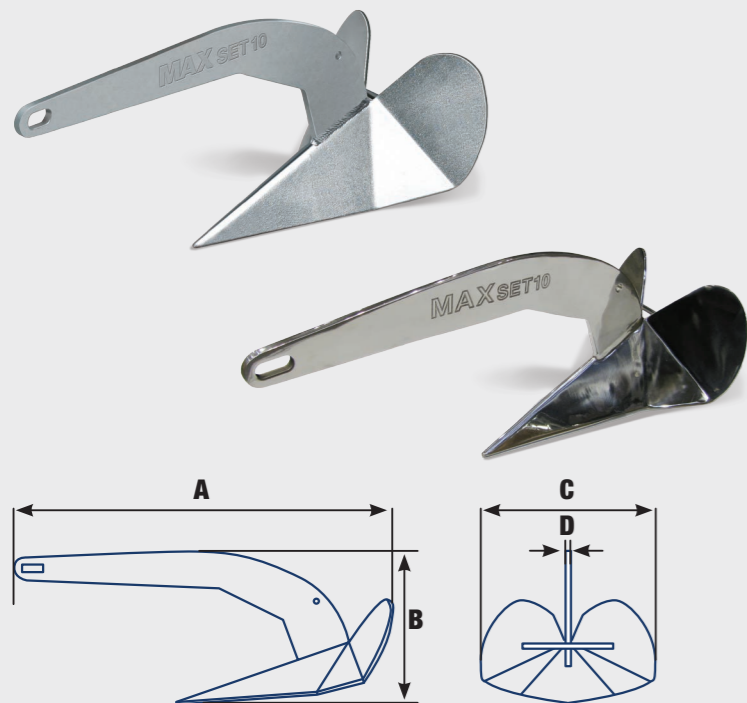

MAXSET ANCHORS STAINLESS STEEL	MAXSET ANCHORS GALVANISED	ANCHOR WEIGHTS	A	B	C	D
P105070	P105069	4kg/9lbs	530mm (20 7/8")	222mm (8 3/4")	245mm (9 5/8")	8mm (5/16")
P105055	P105000	6kg/13lbs	620mm (24 1/2")	230mm (9 1/8")	262mm (10 3/8")	10mm (3/8")
P105056	P105001	10kg/22lbs	730mm (28 3/4")	275mm (10 7/8")	315mm (12 1/2")	12mm (1/2")
P105057	P105002	16kg/35lbs	820mm (32 3/8")	315mm (12 1/2")	340mm (13 1/2")	14mm (9/16")
P105058	P105003	20kg/44lbs	890mm (35")	345mm (13 5/8")	400mm (15 3/4")	16mm (5/8")
P105059	P105004	25kg/55lbs	986mm (38 7/8")	410mm (16 1/8")	445mm (17 1/2")	16mm (5/8")
P105067	P105005	30kg/66lbs	1050mm (38 7/8")	445mm (16 1/8")	465mm (17 1/2")	20mm (5/8")
P105068	P105006	40kg/88lbs	1130mm (44 1/2")	470mm (18 1/2")	510mm (20")	20mm (3/4")

MAXCLAW ANCHORS

The "MAXCLAW" 316 Stainless Steel anchor range, based on the proven 'North Sea' claw design is available in seven different sizes to suit boats from approximately 4 m (12') to 18 m (58').

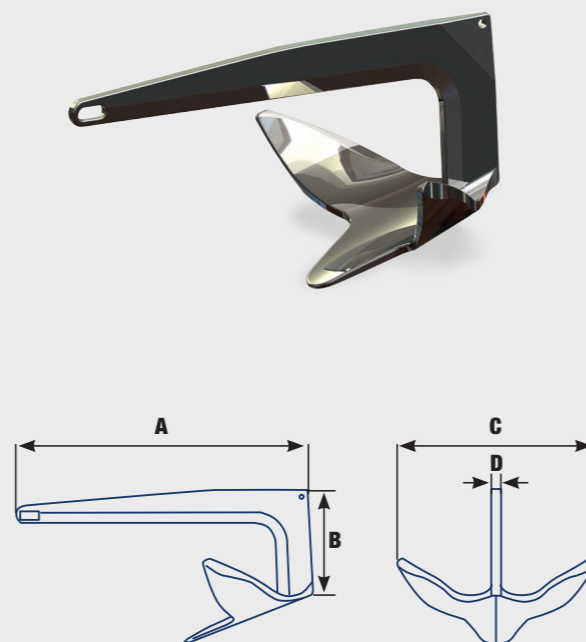

MAXCLAW STAINLESS STEEL	ANCHOR WEIGHTS	A	B	C	D
P105060	5kg/11lbs	470mm (18 5/8")	190mm (7 1/2")	310mm (12 1/4")	15 - 18mm (5/8"-3/4")
P105061	8kg/18lbs	530mm (20 7/8")	210mm (8 3/8")	360mm (14 1/4")	15 - 18mm (5/8"-3/4")
P105062	10kg/22lbs	600mm (23 5/8")	228mm (9")	380mm (15")	15 - 18mm (5/8"-3/4")
P105063	15kg/33lbs	670mm (26 1/2")	265mm (10 1/2")	450mm (17 3/4")	15 - 18mm (5/8"-3/4")
P105064	20kg/44lbs	715mm (28 1/4")	360mm (14 1/4")	470mm (18 5/8")	15 - 20mm (5/8"-7/8")
P105065	30kg/66lbs	815mm (32 1/8")	425mm (16 3/4")	550mm (21 3/4")	18 - 25mm (3/4"-1")
P105066	40kg/88lbs	1000mm (39 3/8")	440mm (17 3/8")	675mm (26 5/8")	18 - 30mm (3/4"-1 1/4")

MAXSET ANCHORS AND MAXSET BOW ROLLERS

See chart below to select the most suitable bow roller for use with your MAXSET or MAXCLAW anchor.

MAXSET ANCHORS			TO SUIT APPROXIMATE BOAT LENGTH										MAXSET BOW ROLLERS	
Stainless Steel	Galvanised	Weight	4M (13')	6M (20')	8M (26')	10M (33')	12M (39')	14M (46')	16M (52')	18M (59')	Satin Finish	Polished Finish		
P105070	P105069	4kg/9lbs									P105074	P105075		
P105055	P105000	6kg/13lbs									P105074	P105075		
P105056	P105001	10kg/22lbs									P105076	P105077		
P105057	P105002	16kg/35lbs									P105078	P105079		
P105058	P105003	20kg/44lbs									P105080	P105081		
P105059	P105004	25kg/55lbs									P105082	P105083		
P105067	P105005	30kg/66lbs									P105082	P105083		
P105068	P105006	40kg/88lbs									P105082	P105083		


MAXCLAW ANCHORS			TO SUIT APPROXIMATE BOAT LENGTH									
		Weight	4M (13')	6M (20')	8M (26')	10M (33')	12M (39')	14M (46')	16M (52')	18M (59')		
P105060		5kg/11lbs										
P105061		7.5kg/17lbs										
P105062		10kg/22lbs										
P105063		15kg/33lbs										
P105064		20kg/44lbs										
P105065		30kg/66lbs										
P105066		40kg/88lbs										



ANCHOR SWIVEL SHACKLES



The use of a swivel and joining shackle to join your anchor and rode will greatly improve anchor retrieval and help ensure that the rode lays neatly into your anchor locker. Thus, they are highly recommended for use with Maxwell's automatic rope/chain series windlasses. Two sizes (6 mm - 8 mm/1/4" - 5/16" and 10 mm - 13 mm/3/8" - 1/2") are available to suit vessels up to 20 metres (65 feet). These robust single swivel anchor connectors, with captured pins, will not loosen under load and pull smoothly and easily over bow rollers. Note: Joining the swivel directly to the anchor is not recommended.

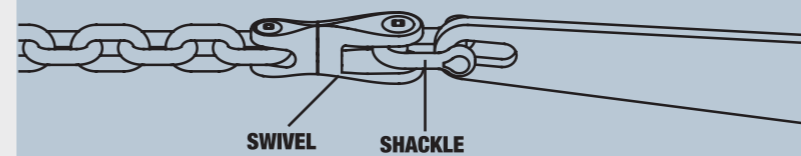

EMERGENCY CRANK/CLUTCH RELEASE HANDLES AND BI-SQUARE EXTENSION DRIVES

The handles are for use with RC8, RC10, RC12 and HRC10 Series anchor winches and are supplied as standard accessories. Note the RC12 Series is also supplied with a specialised emergency crank handle. Two sizes are available to suit the constraints of most foredeck configurations. Constructed of light weight, durable injection-moulded plastic these handles float if accidentally dropped overboard. Also available are two bi-square drives. The Extension unit facilitates access to the windlass clutch release nut in constrained areas and the 1/2" Drive enables the use of a standard 1/2" ratchet driver and is standard with all HRC10 units.

