



3-Way Bilge Pump Switch

7615A

Installation Instructions

Attwood marine hardware, navigational lighting, bilge pumps, and other marine accessories are specified more than any other brand by America's best-known boat manufacturers as original equipment. Look to Attwood for quality replacement parts and marine accessories.

SAVE THESE INSTRUCTIONS

Form Number 69260 Rev. B

03-11

FEATURES

Attwood's 3-Way Bilge Pump Switch is the perfect switch to use with Attwood automatic bilge pumps.

RECOMMENDED TOOLS FOR INSTALLATION

1. Saw or drill for mounting hole
2. Crimp connector pliers
3. Screwdriver

⚠ WARNINGS

1. Must be fused – see pump instructions for correct fuse size.
2. Do not use switch on 115 volt AC.
3. Do not cut pump wires shorter.
4. Secure all wires against movement.
5. Run the pump wires to a point above the highest possible water level.

FAILURE TO PROPERLY FUSE AND MAKE THE APPROPRIATE WATER RESISTANT CONNECTIONS MAY CAUSE PUMP DAMAGE AND WILL VOID THE PRODUCT WARRANTY.

INSTALLATION INSTRUCTIONS

Remove boat from water.

1. Select a mounting location which is flat and has sufficient depth behind it for switch and wires.
2. Cut hole 1-5/8" wide x 7/8" high.
3. Clean mounting surface with detergent and/or rubbing alcohol to remove dirt and wax.
4. Wire as shown in Figure 1 thru trim plate. Press trim plate onto switch, verify correct operation. Peel paper backing from trim plate, push plate firmly against mounting surface.

Figure 1

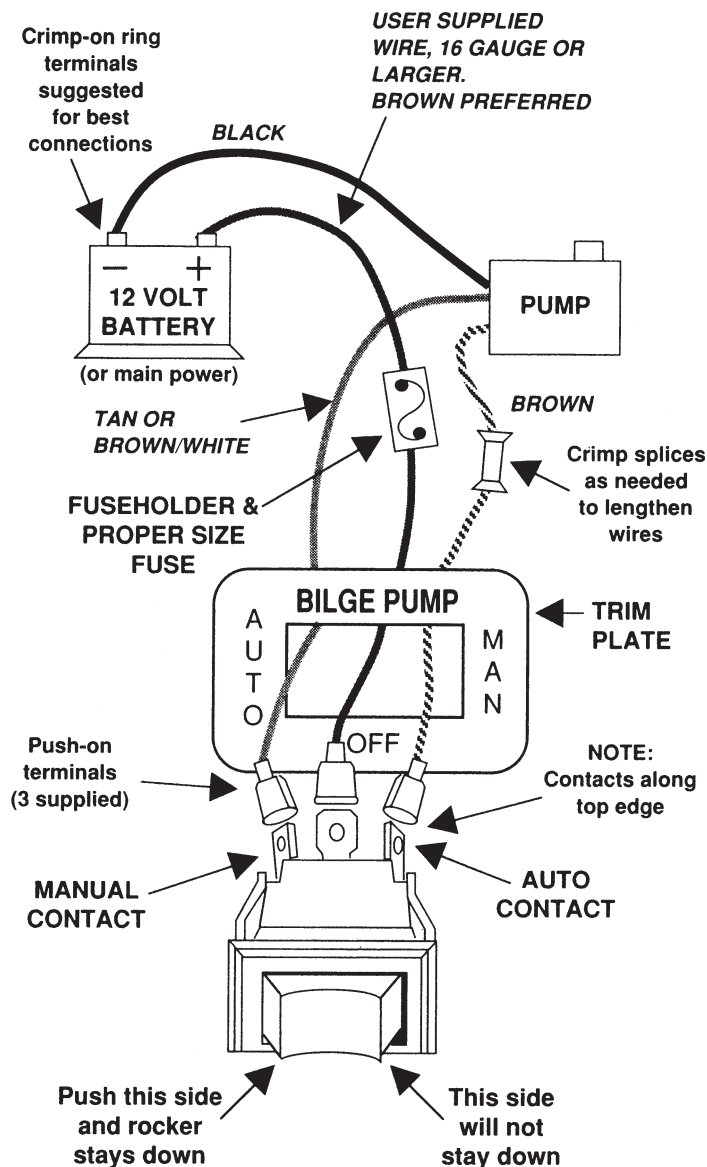


Figure 2

