

## Installation Instructions

**NOTE:** This light features a convenient switch on the end of the light without the cord. If you will be installing the light using an existing switch on your instrument panel, choose an installation location that will allow the cord to reach your source of power.



Consider running the wire along the pipe of your T-top using small cable ties (not supplied).

The black wire is the ground (-). The white (+) positive wire is for use with built-in switch. Switching: white/color/off. The red wire is optional and is used to independently switch the red LED from a dash switch as shown in the wiring diagram below.

When making wiring connections, be absolutely certain that the white lead is connected to the positive side of the power supply; and the black lead is connected to ground. (12-24V DC ONLY). When using an in-line 2 amp fuse, install the fuse in the positive supply side. A dual red/white light switch is built into the end of the light behind the rubber cap marked with the on/off symbol. (NOTE: some force is necessary to deflect the rubber to contact the switch.)

### Box Includes

- 1 LED LIGHT
- 1 ALUMINUM HOUSING (F38-2050-1 ONLY)
- 2 MOUNTING CLIPS
- 2 MOUNTING SCREWS

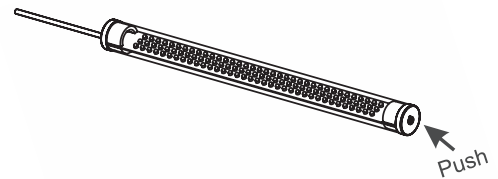

F38-2060-1



F38-2050-1

