

Pacer Group



Construction

Type III Class K annealed fine stranded tinned copper

Enhanced corrosion resistance for all conductors

Proprietary insulation ensures flexibility and durability

Compliances



UL Standard 1426 BC-5W2



ABYC: E-11.14



Coast Guard: 33 CFR part 183



RoHS Compliant

Round Boat Cable

Round boat cable is a type of marine cable designed to be routed through hulls and tight spaces. That is to say, it is designed with flexibility in mind. The round shape of this multi-conductor marine cable allows it to bend in any direction making any installation go much easier. You may not realize just how useful that it, but trust us, when working in tight spaces, you will absolutely want a cable that is extremely flexible.



Resistances



Acid Resistant



Alkali Resistant



Oil Resistant



Moisture Resistant



Abrasion Resistant



Gasoline Resistant




Flame Resistant





PART NUMBER	AWG NO.	NO. OF COND.	CONDUCTOR STRANDING	JACKET THICKNESS (IN.)	NOM. O.D. (IN.)	STANDARD PUT-UPS	CONDUCTOR COLORS	APPRX LB/M
2 CONDUCTOR, GREY JACKET								
WR16/2DCG	16	2	26/0.0100	0.030	0.350	C,TL,D,M	BK, RD	50
WR14/2DCG	14	2	41/0.0100	0.030	0.390	C,TL,D,M	BK, RD	67
WR12/2DCG	12	2	65/0.0100	0.030	0.410	C,TL,D,M	BK, RD	85
WR10/2DCG	10	2	105/0.0100	0.030	0.475	C,TL,D,M	BK, RD	130
3 CONDUCTOR, GREY JACKET								
WR16/3G	16	3	26/0.0100	0.045	0.395	C,TL,D,M	BK, GN, WH	73
WR14/3G	14	3	41/0.0100	0.045	0.410	C,TL,D,M	BK, GN, WH	96
WR12/3G	12	3	65/0.0100	0.045	0.470	C,TL,D,M	BK, GN, WH	131
WR10/3G	10	3	105/0.0100	0.045	0.545	C,TL,D	BK, GN, WH	178

- ➔ Round Boat Cable is built for durability, flexibility, & longevity in the harshest environments
- ➔ So flexible that you can tie it into a knot without compromising any of its qualities
- ➔ Proprietary insulation ensures the highest level of protection available
- ➔ Round shape and flexible design ensure that installation goes smoothly in even the tightest of spaces.

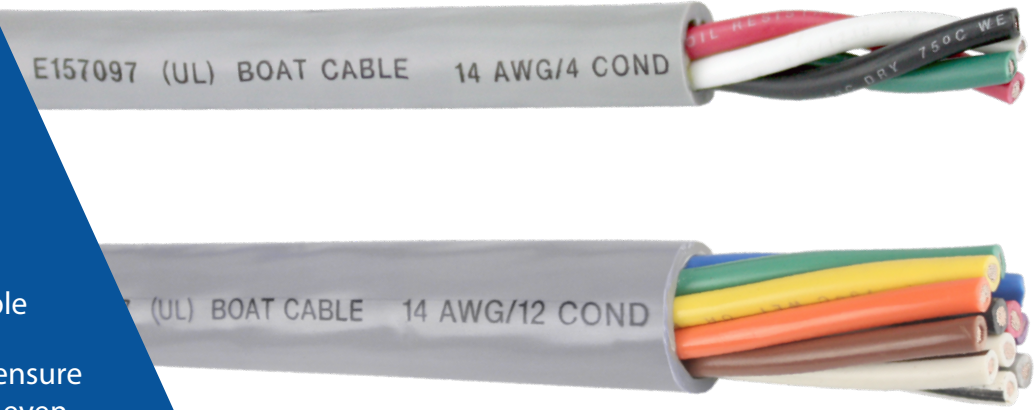

PART NUMBER	AWG NO.	NO. OF COND.	CONDUCTOR STRANDING	JACKET THICKNESS (IN.)	NOM. O.D. (IN.)	STANDARD PUT-UPS	CONDUCTOR COLORS	APPRX LB/M
4 CONDUCTOR, GREY JACKET								
WR16/4G	16	4	26/0.0100	0.045	0.420	L,C,TL,D,M	BK, GN, RD, WH	108
WR14/4G	14	4	41/0.0100	0.045	0.465	L,C,TL,D,M	BK, GN, RD, WH	136
WR12/4G	12	4	65/0.0100	0.045	0.560	L,C,TL,D,M	BK, GN, RD, WH	185
WR10/4G	10	4	105/0.0100	0.045	0.600	L,C,TL,D	BK, GN, RD, WH	253
WR8/4G	8	4	7x24/0.0100	0.080	0.830	L,C,TL,D	BK, GN, RD, WH	475
WR6/3-8/1G	6	4	6 AWG @ 7x38/0.0100 8 AWG @ 7x24/0.0100	0.080	0.985	L,C,TL,D	6 AWG @ BK, RD, WH (8 AWG @ GN)	650
WR4/3-6/1G	4	4	4 AWG @ 7x60/0.0100 6 AWG @ 7x38/0.0100	0.080	1.155	L,C,TL	4 AWG @ BK, BK/RD, WH (6 AWG @ GN)	920
6 CONDUCTOR, GREY JACKET								
WR16/6G	16	6	26/0.0100	0.450	0.455	L,C,TL,D	BK, BR, RD, GN, BL, WH	130
WR14/6G	14	6	41/0.0100	0.450	0.530	L,C,TL,D	BK, BR, RD, GN, BL, WH	200
9 CONDUCTOR, GREY JACKET								
WR14/9G	14	9	41/0.0100	0.450	0.680	L,C,TL	*	280
12 CONDUCTOR, GREY JACKET								
WR14/12G	14	12	41/0.0100	0.600	0.700	L,C,TL	**	375

Online Store
PacerGroup.net
 Phone: 941.378.5774



Corporate Offices
 1555 Apex Road Sarasota, FL 34240
 Toll Free: 1.800.424.9549