

Pacer Group



Triplex Boat Cable

We designed this cable for ease of installation and maximum durability. That means that this cable is not only tough, but extremely flexible as well. We know that wire and cable routing often occurs in tight spaces such as boat hulls. What good is a boat cable if it lacks flexibility? Our triplex boat cable is so flexible that you can literally tie it into a knot and then undo that knot with no damage to the conductors or the insulation.



Construction








Type III Class K annealed fine stranded tinned copper


Specialized processes are used to enhance conductivity

Compliances

-  UL Standard 1426 BC-5W2
-  RoHS Compliant
-  ABYC: E-11.16
-  Coast Guard: 33 CFR part 183
-  UL Compliant

Resistances

-  Acid Resistant
-  Alkali Resistant
-  Oil Resistant
-  Moisture Resistant
-  Abrasion Resistant
-  Gasoline Resistant
-  Flame Resistant

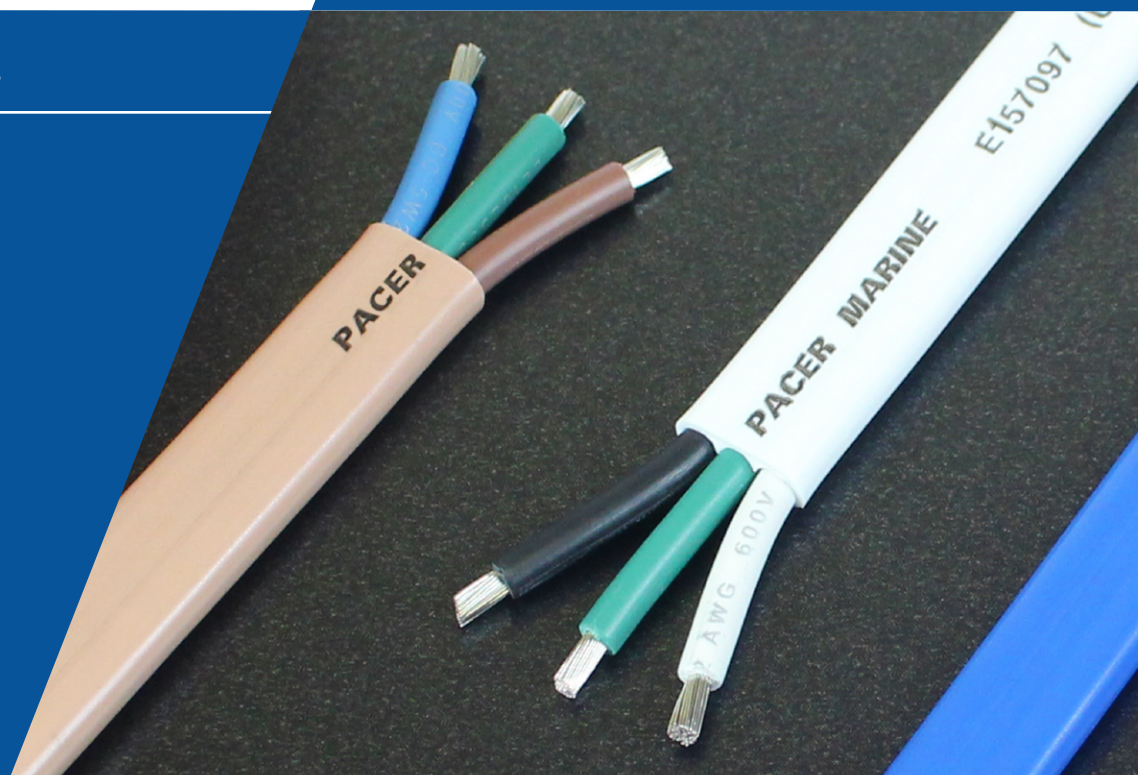



PART NUMBER	AWG NO.	NO. OF COND.	CONDUCTOR STRANDING	NOM. JACKET THICKNESS (IN.)	NOM. CABLE O.D. (IN.)	STANDARD PUT-UPS	APPRX LB/M
UL TRIPLEX CABLE - Black, Green, White Conductors, White Jacket							
W16/3	16	3	26/0.0100	0.030	0.200 x 0.465	C,TL,D,M	93
W14/3	14	3	41/0.0100	0.030	0.210 x 0.505	C,TL,D,M	99
W12/3	12	3	65/0.0100	0.030	0.230 x 0.560	C,TL,D,M	128
W10/3	10	3	105/0.0100	0.030	0.265 x 0.645	C,TL,D	180
W8/3	8	3	7x24/0.0100	0.045	0.375 x 0.930	L,C,TL,D	340
W6/3	6	3	7x38/0.0100	0.045	0.450 x 1.140	L,C,TL,D*	523

- ➔ Built for durability, flexibility, and longevity in the harshest marine environments
- ➔ So flexible that you can tie it into a knot without compromising any of its qualities
- ➔ Proprietary insulation ensures the highest level of protection available
- ➔ Ease of installation and the longevity of its design have helped solidify this battery cable as the choice of boating professionals

PART NUMBER	AWG NO.	NO. OF COND.	CONDUCTOR STRANDING	NOM. JACKET THICKNESS (IN.)	NOM. CABLE O.D. (IN.)	STANDARD PUT-UPS	APPRX LB/M
UL TRIPLEX "EURO" CABLE - Brown, Green/Yellow, Lt. Blue, Tan Jacket							
W16/3EURO	16	3	26/0.0100	0.030	0.200 x 0.465	M	93
W14/3EURO	14	3	41/0.0100	0.030	0.210 x 0.505	C,TL,D,M	99
W12/3EURO	12	3	65/0.0100	0.030	0.230 x 0.560	C,TL,D,M	128
W10/3EURO	10	3	105/0.0100	0.030	0.265 x 0.645	C,TL,D	180
W8/3EURO	8	3	7x24/0.0100	0.045	0.375 x 0.930	C,TL,D	340
W6/3EURO	6	3	7x38/0.0100	0.045	0.450 x 1.140	C,TL	523
UL TRIPLEX "240-V" CABLE - Black, Green, Red Conductors, Blue Jacket							
W14/3B	14	3	41/0.0100	0.030	0.210 x 0.505	C,TL,D,M	99
W12/3B	12	3	65/0.0100	0.030	0.230 x 0.560	C,TL,D,M	128