


HR snap shackle - Webbing swivel - Length: 100 mm

Part #2376

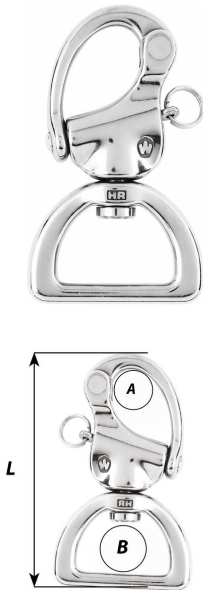

Description

HR Forged snap shackle (Grade 17.4 PH stainless steel) with webbing swivel.

Its flat design allows to attach a webbing

Free rotation of the snap shackle thanks to the swivel eye

The plunger pin is set captive into the hook and cannot

become detached

Excellent working and breaking loads


Easy to open by pulling the plunger pin (possibility to attach a lanyard)

Applications

Snap shackle applications

Applications requiring a free rotation of the snap shackle (for a better sail orientation)

Technical information

Materials	HR 17.4 PH stainless steel grade
Length (inch)	3 15/16"
 Working load (lb)	2820
Breaking load (lb)	8480
Weight (lb)	0.375
A (inch)	53/64"
B (inch)	1 37/64"

Caption



Working load (WL) : for nautical applications



Working Load Limit (WLL): for industrial applications only.

The safety factor is 5 times the breaking load.

WLL = Breaking load / 5

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated on this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department when ordering the products.

Non-contractual pictures.