


Chain grip - For 12 mm chain - Length: 125 mm

Part #2996

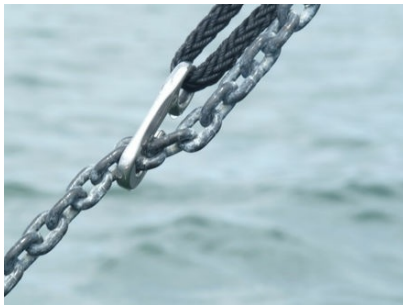


Description

For 12 mm chain
Perfect to ensure a safe anchoring by easing the tension on the anchor chain
Protects the boat by reducing the chafe of the chain on rub rail and roller chock
Positionned between two links of the chain (single handed operation)
Optimized design to avoid accidental release of the chain
One piece with non moving parts
Forged in Duplex stainless steel grade (increased mechanical & corrosion resistance)
Made in France
Rope size: 24 mm

Applications

Mooring

Technical information

Materials	Duplex stainless steel grade
Rope size	24
Length (mm)	125
 Working load (kg)	960
Weight (g)	287

Caption



Working load (WL) : for nautical applications



Working Load Limit (WLL): for industrial applications only.
The safety factor is 5 times the breaking load.
WLL = Breaking load / 5

Wichard strives to ensure, to the best of its ability, the accuracy and the update of the information disseminated on this document, and reserves the right to correct at any time and without notice the content, as well as to evolve its products.

In the case of an industrial application, please contact our sales and technical department to validate the use of these products. The request for certificates can be made directly with the sales department when ordering the products.

Non-contractual pictures.