


## Rib

**APPLICABLE PRODUCTS:** All B900 series

This is a general guide to show you how simple it is to install an em-trak AIS transceiver.

If you have any questions at any time you can contact our team [support@em-trak.com](mailto:support@em-trak.com)

- AIS starts up automatically every time engine starts.
- Wireless connection to your phone and any other display device such as chart plotter.
- See all AIS targets and vessel info.

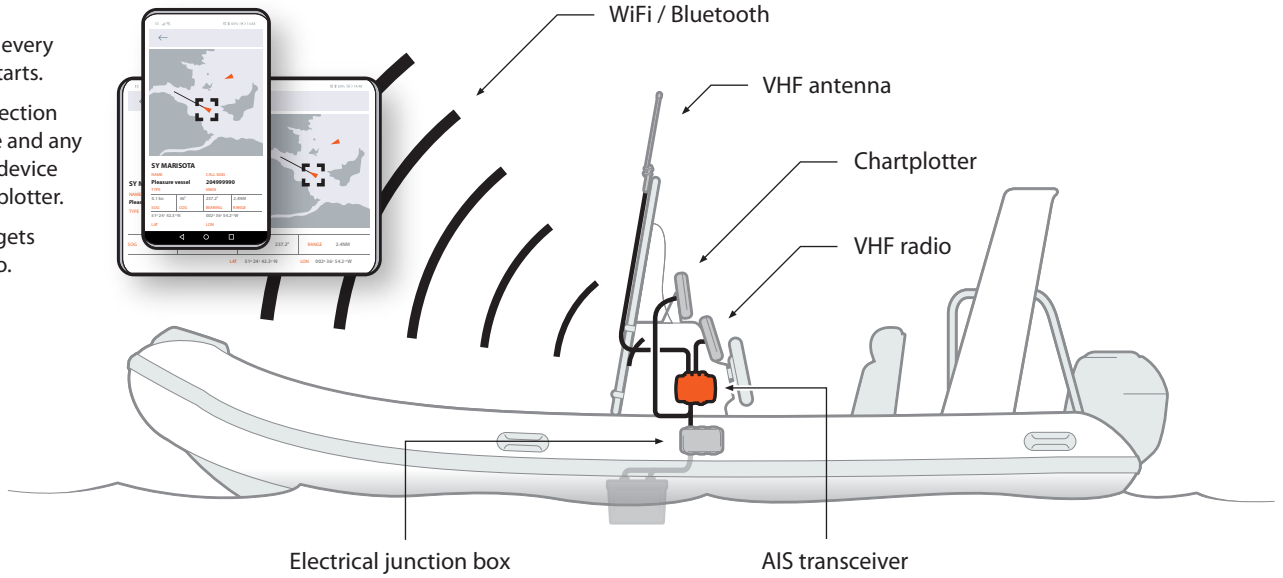

**1**

No screws required!

Use bracket to fit AIS into convenient storage / utility area.

**2**

Connect to your VHF radio, VHF antenna and power.

AIS has internal GPS so if you install near a window, under a fibreglass deck or inside a centre console you will not need an external GPS antenna.

**3**

Switch power on and use **CONNECT-AIS** app or **PROAIS2** PC Software to program AIS with your vessel information.

em-trak CONNECT-AIS

Smartphone / Wireless display device

WiFi / Bluetooth

AIS transceiver

NMEA0183 & 2000

+/-

**CONNECT-AIS**

**4**

See AIS targets and information on your chartplotter, smart phone and other wireless devices.

WiFi / Bluetooth

Chartplotter